



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp®2006 = 123

SPECfp\_base2006 = 118

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

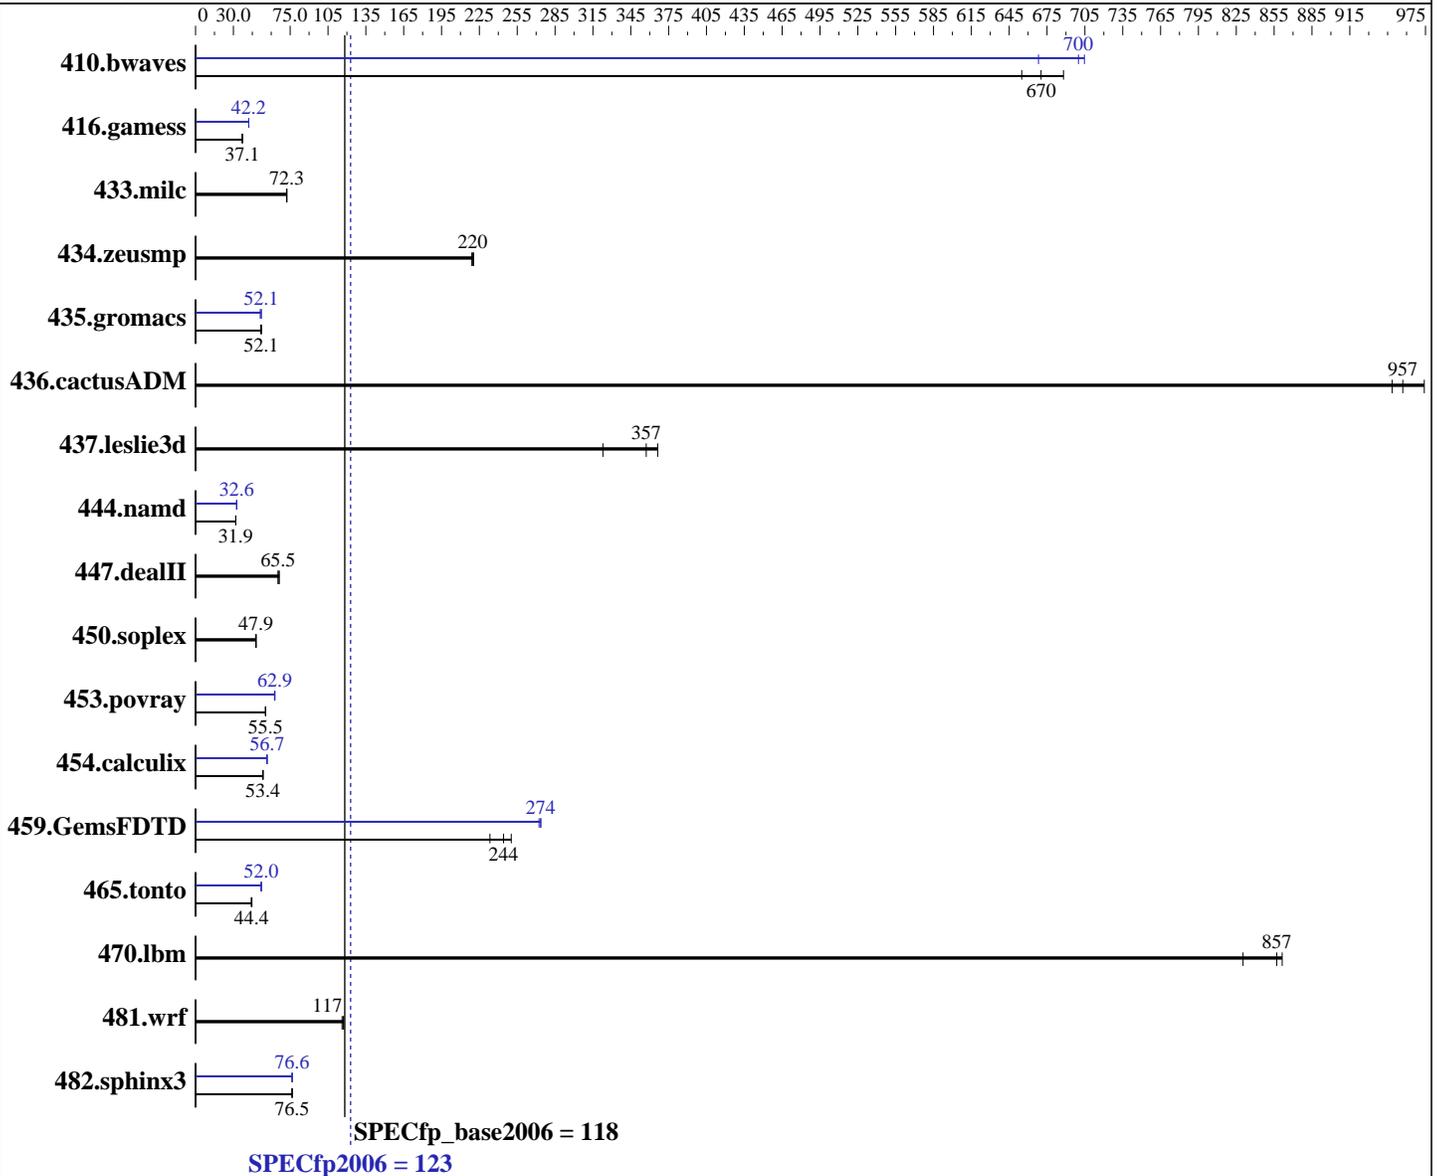

## Hardware

CPU Name: Intel Xeon E5-2697A v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2, (Maipo)  
 Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp2006 = 123

SPECfp\_base2006 = 118

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<u>20.3</u>	<b>670</b>	19.8	688	20.8	655	<u>19.4</u>	<b>700</b>	19.3	705	20.3	668
416.gamess	529	37.0	527	37.1	<u>528</u>	<u>37.1</u>	464	42.2	<u>464</u>	<u>42.2</u>	464	42.2
433.milc	127	72.4	<u>127</u>	<b>72.3</b>	127	72.1	127	72.4	<u>127</u>	<b>72.3</b>	127	72.1
434.zeusmp	<u>41.4</u>	<b>220</b>	41.3	220	41.6	219	<u>41.4</u>	<b>220</b>	41.3	220	41.6	219
435.gromacs	137	52.2	<u>137</u>	<b>52.1</b>	138	51.7	<u>137</u>	<b>52.1</b>	137	52.1	139	51.3
436.cactusADM	12.6	949	12.3	974	<u>12.5</u>	<b>957</b>	12.6	949	12.3	974	<u>12.5</u>	<b>957</b>
437.leslie3d	25.7	366	<u>26.3</u>	<b>357</b>	29.1	323	25.7	366	<u>26.3</u>	<b>357</b>	29.1	323
444.namd	<u>252</u>	<b>31.9</b>	251	31.9	252	31.9	<u>246</u>	<b>32.6</b>	246	32.6	246	32.6
447.dealII	175	65.5	172	66.4	<u>175</u>	<b>65.5</b>	175	65.5	172	66.4	<u>175</u>	<b>65.5</b>
450.soplex	<u>174</u>	<b>47.9</b>	174	48.0	175	47.7	<u>174</u>	<b>47.9</b>	174	48.0	175	47.7
453.povray	96.1	55.3	<u>95.8</u>	<b>55.5</b>	95.7	55.6	84.6	62.9	<u>84.6</u>	<b>62.9</b>	85.0	62.6
454.calculix	154	53.4	154	53.5	<u>154</u>	<b>53.4</b>	<u>145</u>	<b>56.7</b>	145	56.7	146	56.6
459.GemsFDTD	42.4	250	45.5	233	<u>43.5</u>	<b>244</b>	<u>38.8</u>	<b>274</b>	38.8	274	39.0	272
465.tonto	220	44.7	223	44.2	<u>221</u>	<b>44.4</b>	189	52.0	188	52.2	<u>189</u>	<b>52.0</b>
470.lbm	16.5	830	16.0	861	<u>16.0</u>	<b>857</b>	16.5	830	16.0	861	<u>16.0</u>	<b>857</b>
481.wrf	96.2	116	<u>95.4</u>	<b>117</b>	95.1	117	96.2	116	<u>95.4</u>	<b>117</b>	95.1	117
482.sphinx3	254	76.6	<u>255</u>	<b>76.5</b>	255	76.5	<u>255</u>	<b>76.6</b>	254	76.7	255	76.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
Intel Hyperthreading set to Disabled  
Power Profile set to Maximum Performance  
QPI Snoop Configuration set to Home Snoop  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.60 GHz, Intel Xeon E5-2697A v4)

**SPECfp2006 = 123**

**SPECfp\_base2006 = 118**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes (Continued)

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on Pilot-XL420-G9 Wed May 18 11:42:01 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697A v4 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal:      263891008 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux Pilot-XL420-G9 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 18 11:40
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  361G   18G  326G   5% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp2006 =

123

SPECfp\_base2006 =

118

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U19 03/10/2016

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:  
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp2006 =

123

SPECfp\_base2006 =

118

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint
-fp-model fast=2

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.60 GHz, Intel Xeon E5-2697A v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**118**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -ansi-alias  
-fp-model fast=2  
-qopt-prefetch-issue-excl-hint -funroll-all-loops

-nofor-main

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch  
-fp-model fast=2  
-qopt-prefetch-issue-excl-hint -funroll-all-loops

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp2006 = 123

SPECfp\_base2006 = 118

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -ansi-alias  
-fp-model fast=2  
-qopt-prefetch-issue-excl-hint -funroll-all-loops  
-auto-ilp32

-nofor-main

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 30 14:07:17 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 June 2016.