



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp®_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

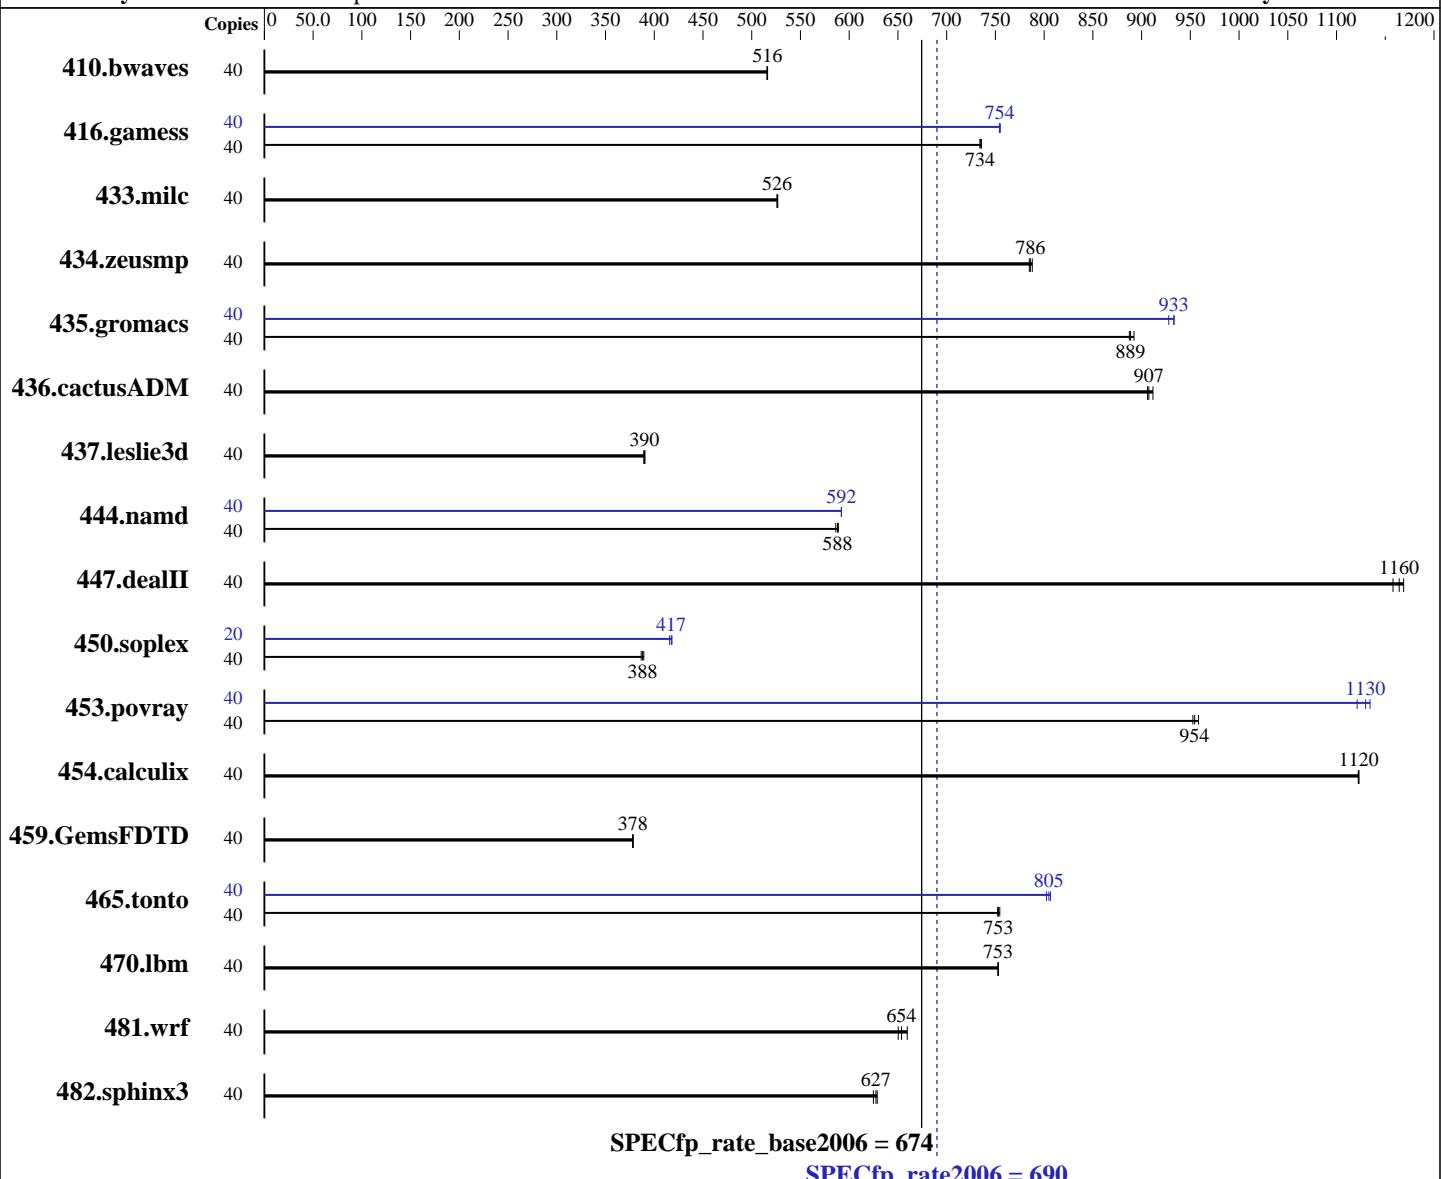

Hardware

CPU Name: Intel Xeon E5-2640 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
Compiler: Kernel 3.12.49-11-default
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|---------------|--------|------------|-------------|-------------|------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 40 | 1053 | 516 | 1054 | 516 | 1053 | 516 | 40 | 1053 | 516 | 1054 | 516 | 1053 | 516 | | |
| 416.gamess | 40 | 1067 | 734 | 1067 | 734 | 1065 | 736 | 40 | 1038 | 754 | 1039 | 754 | 1037 | 755 | | |
| 433.milc | 40 | 697 | 527 | 698 | 526 | 698 | 526 | 40 | 697 | 527 | 698 | 526 | 698 | 526 | | |
| 434.zeusmp | 40 | 464 | 785 | 463 | 786 | 462 | 788 | 40 | 464 | 785 | 463 | 786 | 462 | 788 | | |
| 435.gromacs | 40 | 322 | 887 | 320 | 892 | 321 | 889 | 40 | 308 | 928 | 306 | 933 | 306 | 933 | | |
| 436.cactusADM | 40 | 527 | 907 | 524 | 912 | 528 | 906 | 40 | 527 | 907 | 524 | 912 | 528 | 906 | | |
| 437.leslie3d | 40 | 964 | 390 | 966 | 389 | 963 | 390 | 40 | 964 | 390 | 966 | 389 | 963 | 390 | | |
| 444.namd | 40 | 545 | 589 | 547 | 586 | 546 | 588 | 40 | 542 | 592 | 542 | 592 | 542 | 592 | | |
| 447.dealII | 40 | 391 | 1170 | 395 | 1160 | 393 | 1160 | 40 | 391 | 1170 | 395 | 1160 | 393 | 1160 | | |
| 450.soplex | 40 | 857 | 389 | 863 | 387 | 860 | 388 | 20 | 399 | 418 | 400 | 417 | 401 | 416 | | |
| 453.povray | 40 | 223 | 953 | 223 | 954 | 222 | 958 | 40 | 190 | 1120 | 188 | 1130 | 188 | 1130 | | |
| 454.calculix | 40 | 294 | 1120 | 294 | 1120 | 294 | 1120 | 40 | 294 | 1120 | 294 | 1120 | 294 | 1120 | | |
| 459.GemsFDTD | 40 | 1123 | 378 | 1123 | 378 | 1121 | 378 | 40 | 1123 | 378 | 1123 | 378 | 1121 | 378 | | |
| 465.tonto | 40 | 523 | 753 | 522 | 755 | 523 | 752 | 40 | 491 | 802 | 489 | 805 | 488 | 807 | | |
| 470.lbm | 40 | 730 | 753 | 730 | 753 | 730 | 753 | 40 | 730 | 753 | 730 | 753 | 730 | 753 | | |
| 481.wrf | 40 | 687 | 650 | 684 | 654 | 677 | 660 | 40 | 687 | 650 | 684 | 654 | 677 | 660 | | |
| 482.sphinx3 | 40 | 1248 | 625 | 1240 | 629 | 1243 | 627 | 40 | 1248 | 625 | 1240 | 629 | 1243 | 627 | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes

BIOS Configuration:

Cluster On Die set to Disabled

Early Snoop set to Disabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to High Fan Speed

Memory Power Savings set to Disabled

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on rd550-mlk-rackA02 Mon May 30 04:54:09 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
        2 "physical id"s (chips)
        40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 10
        siblings   : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:       264556336 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
uname -a:  
Linux rd550-mlk-rackA02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC  
2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 29 17:26
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda4        xfs   690G  7.9G  683G  2% /home
```

Additional information from dmidecode:

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS LENOVO PB1TS335 01/09/2016
```

Memory:

```
16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at  
2133 MHz  
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.40 GHz, Intel Xeon E5-2640 v4)

SPECfp_rate2006 = 690

SPECfp_rate_base2006 = 674

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:33:18 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.